



OBSTRUCTION LIGHTS MEDIUM INTENSITY LED

LMIC TYPE C – RED STEADY BURNING

01. DESCRIPTION

The LEDEOMIC is a medium intensity light with multi-LEDs technology, developed with an aluminium design for a natural fresh cooling system. Dedicated to a night beaconing, it is a long life system (100 000 hours), very strong with a low consumption (<50w). The LEDEOMIC is provided with a photocell for an automatic switch ON / OFF, and a dry contact for failure alarm. Moreover, it can be solar power supplied. It has been designed for an easy installation.

02. ADVANTAGES

- Long life time > 10 years
- Multi-LEDs
- Low consumption <50W
- Delta Box exclusive self-test included with photocell
- No maintenance
- 2 years warranty
- Zamac box with epoxy powder painting
- IP66


03. APPLICATIONS

Rules concerning aircraft beaconing are established by the ICAO (Annex 14, Chapter 6). Medium Intensity lights can be installed on structures from 45 to 150 meters tall, with an intermediary level of marking. According to the rules, an uninterruptible power supply cabinet has to be installed to assure 12 hours of beaconing in case of power supply failure.

04. MODELS

REFERENCE	VOLTAGE	PHOTOCELL	DRY CONTACT
LMIC00BB*	48V DC	Not included	Not included
LMIC11BB	48V DC	Included	Included
LMIC00MB*	110-240 AC	Not included	Not included
LMIC11MB	110-240 AC	Included	Included

*to be installed with the Safebox or a solar power supply

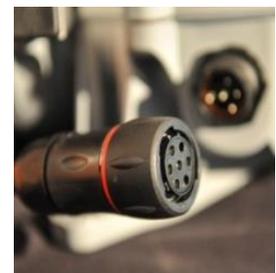

REGULATIONS

- OACI, STAC N° 2013A045
- CE
- FAA Compliant L-864

SCOPE OF APPLICATIONS





05. CHARACTERISTICS

LUMINOUS

Luminous source	LEDS
Color	Red steady burning
Horizontal beam	360°
Vertical beam	3°
Luminous intensity	2 000 Cd
MTBF	100 000 hours

ELECTRICAL

Voltage	48V DC / 110-240V AC
Functioning temperature	-55°C to +55°C
Consumption	<50 Watts
Current Imax	To 48V : I = 1 400mA To 230V : I < 350mA
Protection class	IP66

MECHANICAL

Body material	Zamac
Body lamp material	Aluminium
Lens material	Polycarbonate
Mounting	M8 screw (Not included)
Height	365mm
Width	410mm
Weight	16 Kg

ENVIRONMENTAL

Humidity	100%
Frost	-60°C
Wind speed	240 Km/h

CERTIFICATIONS

CE	EN60947-1 CEI60364, NF C15-100 2014 / 35 / UE
OACI	Annex 14, Volume I, Chapter 6
FAA	Compliant L-864
Quality	ISO 9001 ; 2008


WARRANTY

Warranty period	2 years
-----------------	---------


OPTIONS

Photocell	✓
Dry contact for failure alarm	✓

+ DIMENSIONS

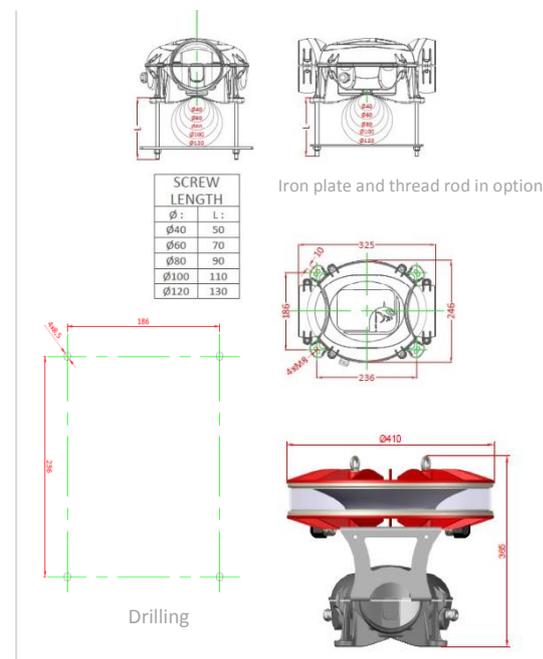

+ WIRING

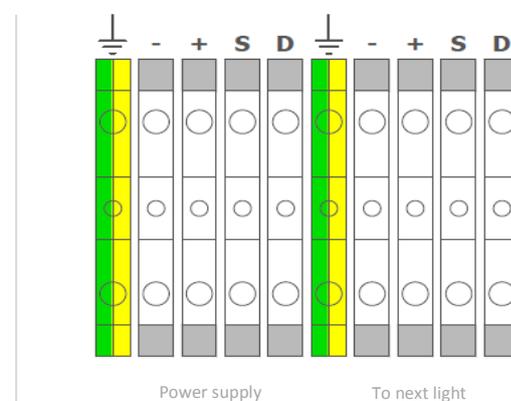

+ AVAILABLE ACCESSORIES FOR INSTALLATION

- Power supply
- UPS System
- Solar kit
- Iron plate and thread rod